

# Service Technical Information

MODEL NO.	MD Mechanism 3ZG-5
SUBJECT	Warnings when replacing SHAFT, PU GUIDE A and HLDR, PU GUIDE A

REF.No. :G – A0 – 010 – E0

DATE :26. APR. 2000

## <CONTENTS>

SHAFT, PU GUIDE A, and HLDR, PU GUIDE A are being modified.


To maintain compatibility, please confirm whether or not the sheet in the following diagram is present.

When the sheet is present:

Remove the sheet and replace at the same time SHAFT, PU GUIDE A, and HLDR, PU GUIDE A with the parts listed in the part codes below.

When the sheet is not present:

SHAFT, PU GUIDE A, and HLDR, PU GUIDE A, respectively, can be replaced individually. However, upon replacement, use the part numbers listed in the part codes below.

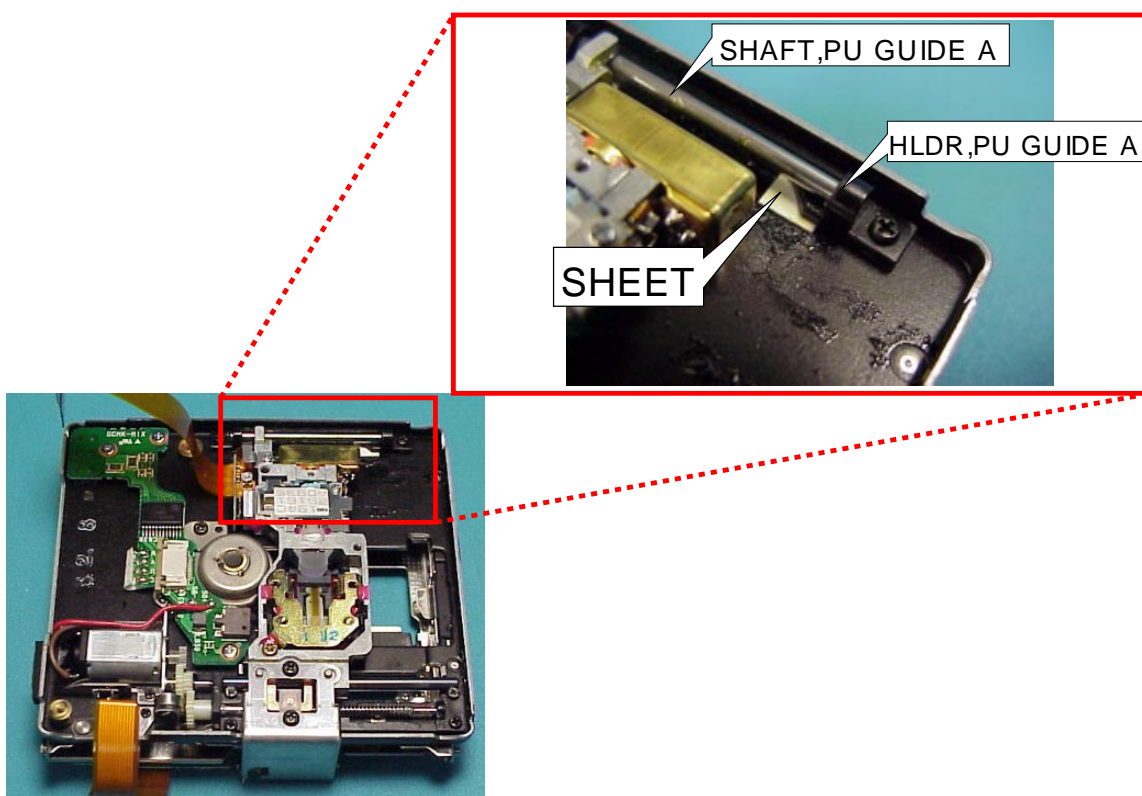

3ZG-5

Ref.	Parts Code	Description	Remarks
–	83-ZG5-311-010	SHAFT,PU GUIDE A	–
–	83-ZG5-252-310	HLDR,PU GUIDE A	–

G	R	Code No.	Access Code	Modified Ser. No.	Parts Schedule
–	–	–	–	–	–